

29D PURETIC POWERBLOCK

29D Hi - Lift Powerblock

Now with 2 speed motor option.

Hydraulic Motor:

B29 Powerblocks are available with 6 sizes of motors including two sizes of 2 speed motors. Haul with high torque or dry up the net at high speed.

Choose a single speed or 2 speed motor. We can size the motor to your hydraulic system based on your requirements for speed or pull. All hydraulic motors are now marinized for longer service life.

Powergrip:

The yoke mounted Powergrip helps keep the net square when hauling, increasing traction and control of the net in rough weather.

Powergrip tire assemblies have galvanized rims for long service life in a saltwater environment and are available in a number of different styles, heights and widths to customize the grip based on your net size and fishery.

Hydraulic Swivel:

Rotate your powerblock 360 degrees. The load bearing hydraulic swivel option allows the powerblock

easily haul port or starboard without binding the hydraulic hoses.


Bolt in Cleated Sheave:

4 different styles of cleats are available to customize your powerblock.

Rubber, Aluminum, Low Profile Polyurethane or High Profile Polyurethane.



Model	Weight LBS	Height Inches
B29 Plain	425	44
B29 With Powergrip	615	44
B29 With Powergrip and Swivel	700	64

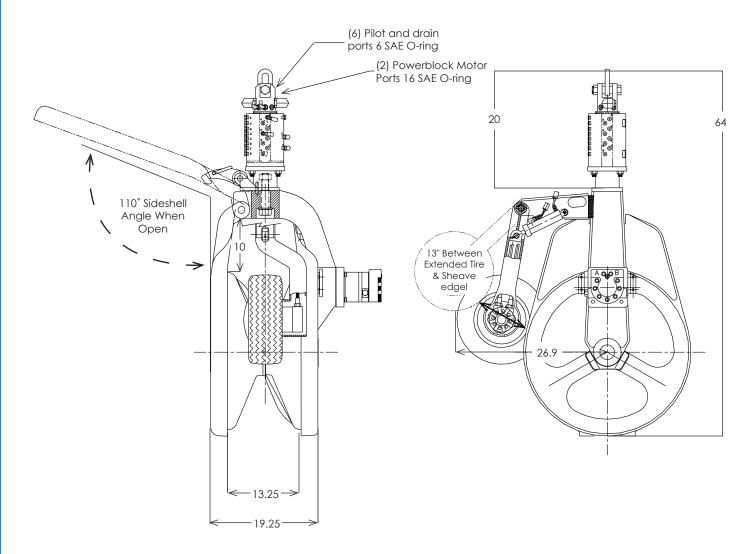

Model	Sheave Speed		Net Pull	Hydraulic Oil Input	
	FPM	RPM	@ 1/2 Radius	Flow GPM	Pressure PSI
B29D - 015 - B9929J-SWL	173	35	4650	20	2000
B29D - 019 - B9929J-SWL	172	35	5870	25	2000
B29D - 024 - B9929J-SWL	176	35	6975	32	2000
B29D - 030 - B9929J-SWL	174	35	8815	40	2000
B29J - 016/024 - B9929J-SWL	236H / 176L	53H / 35L	4650H / 6975L	32	2000
B29J - 020/030 - B9929J-SWL	261H / 174L	53H / 35L	6100H / 8815L	40	2000

^{*}Maximum recommended continuous hydraulic flow is 40 GPM @ 2000 PSI Sheave capacity is 35 inches of compact net circumference

Smith Berger Marine, Inc.

7915 10th Ave. S., Seattle, WA 98108 USA
Tel. 206.764.4650 - Toll Free 888.726.1688 - Fax 206.764.4653
E-mail: sales@smithberger.com - Web: www.smithberger.com